

# CELL C LTE MANUAL APN CONFIGURATION

FOR HUAWEI B315 AND B618 DEVICES



# STEP 1 | ACCESSING THE LOGIN INTERFACE

1. Once the client has followed the steps in the startup guide and plugged in the LAN cable, they should automatically be redirected to a web browser. Should automatic redirect not happen, the client should open their default browser and enter the default IP address (192.168.8.1) in the address bar and the Huawei Configure Settings page will be displayed.
2. Click on **Connection Settings** and enter the default username 'admin' and password 'admin' if this has not previously been changed.

# STEP 2 | CONFIGURE WLAN SETTINGS

1. The **Configure WLAN Settings** page will now appear. Should the client wish to change their SSID, this can be done by editing the name in the **SSID** free text field. Passwords can be changed by checking the **Modify Password** option. Click **Next**.

The screenshot shows the Huawei web interface for configuring WLAN settings. At the top, there is a language dropdown set to 'English', and links for 'Help', 'admin', and 'Log Out'. Below this is a navigation bar with 'Settings' and 'Quick Setup' buttons. The main content area is titled 'Configure WLAN Settings' and 'Step 1 of 3'. It contains a text input field for the SSID, currently containing 'HUAWEI-B618-F35C', and a checkbox for 'Modify Password' which is unchecked. A 'Next' button is located at the bottom right of the form.

HUAWEI English Help admin Log Out

Settings Quick Setup

### Configure WLAN Settings Step 1 of 3

**Name SSID (Service Set Identifier):** Enter a character string, of up to 32 characters in length, as the name for your wireless local area network (WLAN).


SSID:

Modify Password

Next

# STEP 2 CTD... | UPDATE CONFIGURATION

1. Choose preference and **Click Next**

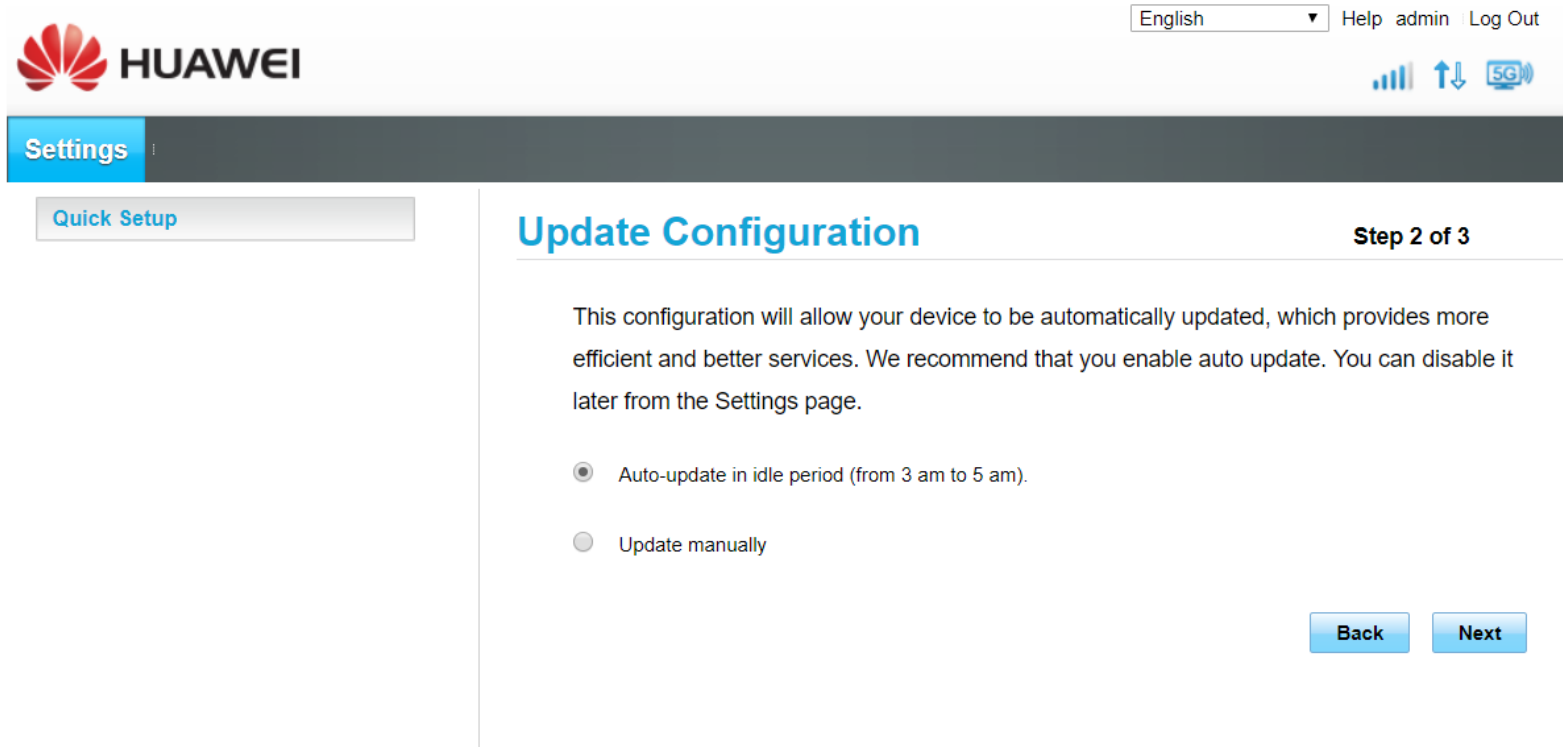

**HUAWEI** English Help admin Log Out

Settings

Quick Setup

## Update Configuration

Step 2 of 3

This configuration will allow your device to be automatically updated, which provides more efficient and better services. We recommend that you enable auto update. You can disable it later from the Settings page.

- Auto-update in idle period (from 3 am to 5 am).
- Update manually

Back Next

# STEP 2 CTD... | MODIFY PASSWORD

1. Update password and **Click Finish**

The screenshot displays the Huawei web configuration interface. At the top left is the Huawei logo. The top right corner shows a language dropdown set to 'English', and links for 'Help', 'admin', and 'Log Out'. Below the header is a navigation bar with 'Settings' and 'Quick Setup' tabs. The main content area is titled 'Modify Password' and is labeled 'Step 3 of 3'. It contains a paragraph of instructions: 'Changing the password for logging in to the web configuration frequently prevents unauthorized users from modifying web configurations. The new password should consist of numbers, letters, or characters. For password strength rules, see [Help](#).' Below this are four input fields: 'Current password:', 'New password:', 'Confirm password:', and a 'Password strength:' section with three radio buttons labeled 'Low', 'Middle', and 'High'. At the bottom right of the form are two buttons: 'Back' and 'Finish'.

English Help admin Log Out

HUAWEI

Settings Quick Setup

## Modify Password

Step 3 of 3

Changing the password for logging in to the web configuration frequently prevents unauthorized users from modifying web configurations. The new password should consist of numbers, letters, or characters. For password strength rules, see [Help](#).

Current password:

New password:


Password strength:  Low  Middle  High

Confirm password:

Back Finish


# STEP 3 | APN SETTINGS

1. Click on the **Settings tab** or **Connection Settings link**

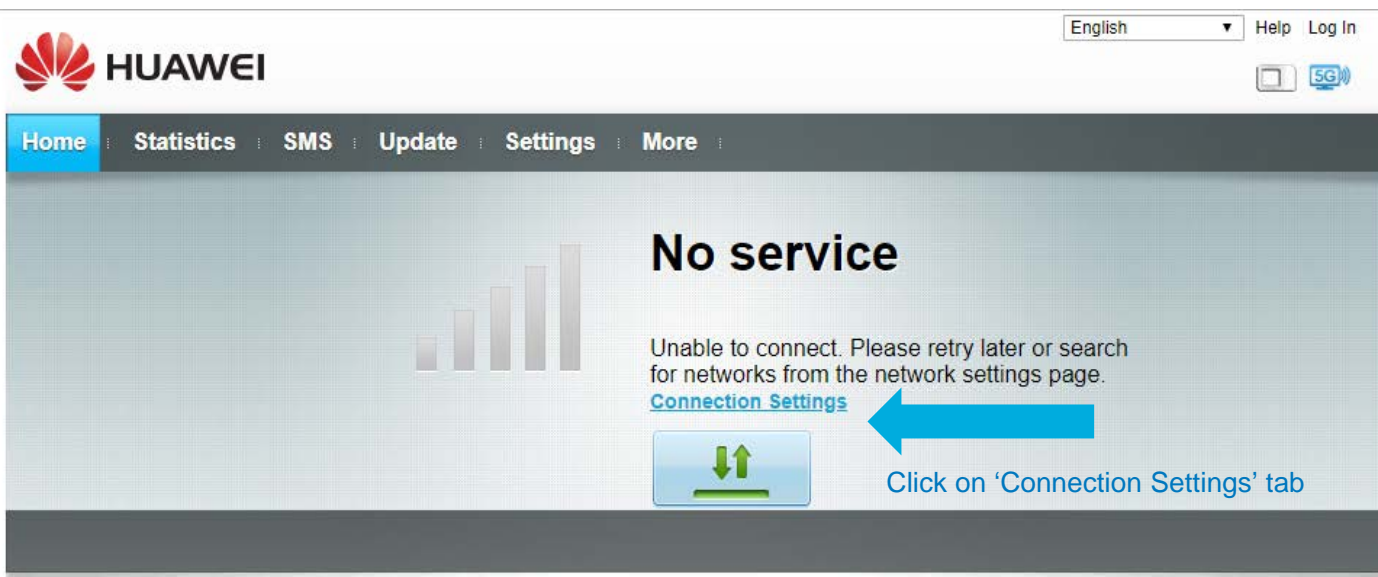

# STEP 4 | PROFILE MANAGEMENT

1. Click **Dial Up** on the left hand navigation and select the sub-option **Profile Management**

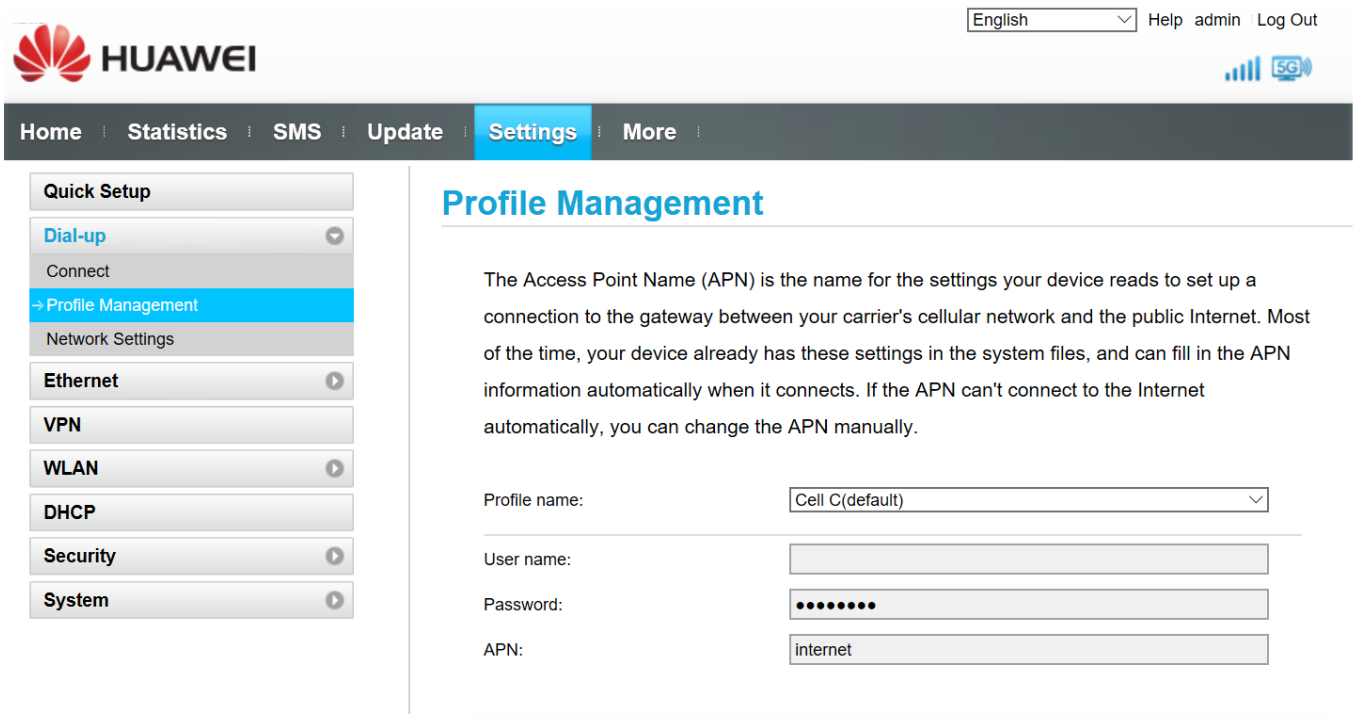


The screenshot displays the Huawei web interface. At the top right, there is a language dropdown set to 'English', and links for 'Help', 'admin', and 'Log Out'. The main navigation bar includes 'Home', 'Statistics', 'SMS', 'Update', 'Settings', and 'More'. The 'Settings' menu is expanded, showing options like 'Quick Setup', 'Dial-up', 'Connect', 'Profile Management', 'Network Settings', 'Ethernet', 'VPN', 'WLAN', 'DHCP', 'Security', and 'System'. The 'Profile Management' tab is highlighted in blue. An arrow points to this tab with the text: "Click on the 'Profile Management' tab located under the 'Dial-Up' tab".

The 'Profile Management' page contains the following text: "The Access Point Name (APN) is the name for the settings your device reads to set up a connection to the gateway between your carrier's cellular network and the public Internet. Most of the time, your device already has these settings in the system files, and can fill in the APN information automatically when it connects. If the APN can't connect to the Internet automatically, you can change the APN manually."

Below the text are input fields for: Profile name (Cell C(default)), User name, Password (masked with dots), and APN (internet). At the bottom, there are three buttons: 'New Profile', 'Delete', and 'Apply'. An arrow points to the 'New Profile' button with the text: "Click on the 'New Profile' tab to create a new profile".

# STEP 5 | UPDATING THE APN PROFILE

1. The **New Profile** window will pop up. Enter APN: **lte.broadband.is** and click **save**

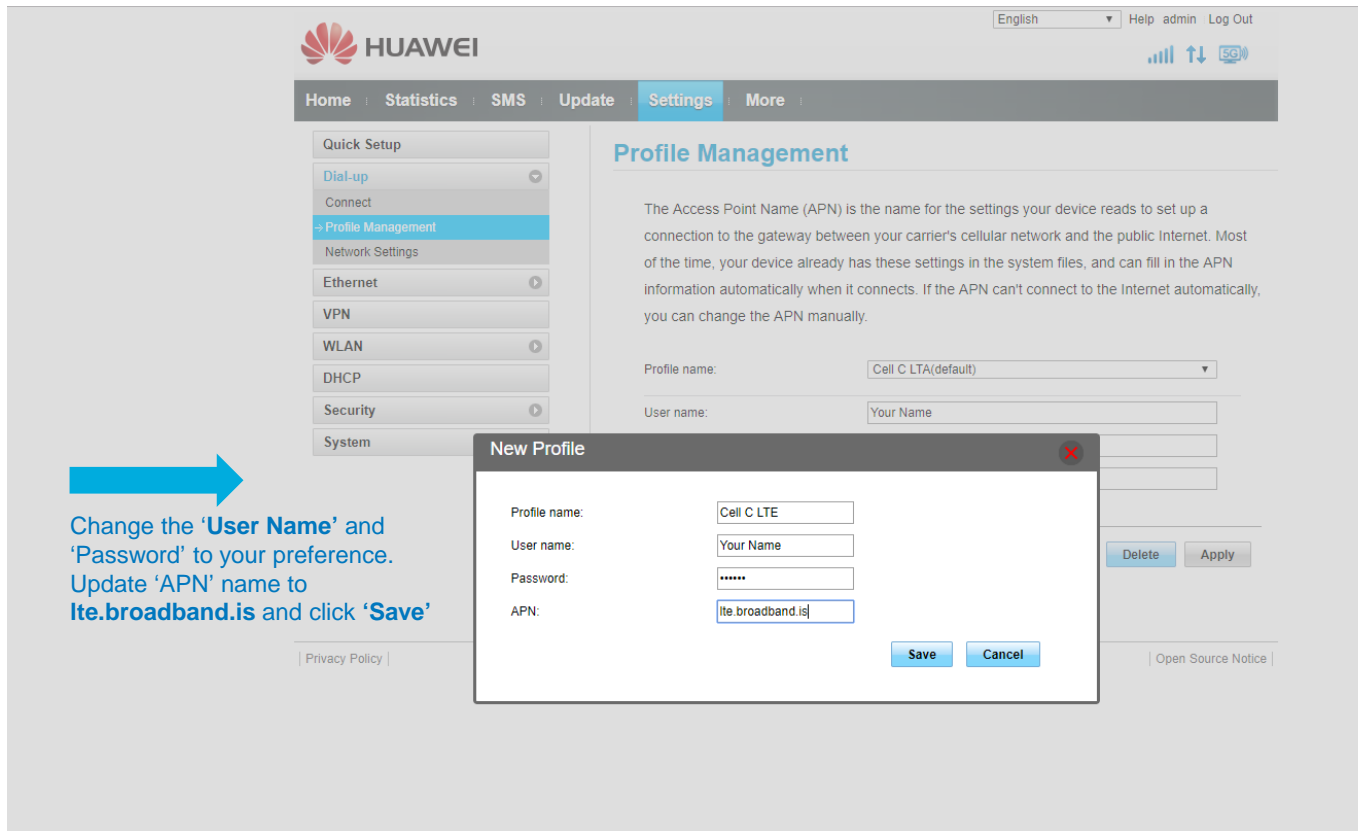

The screenshot shows the Huawei Settings application. The 'Settings' menu is open, and 'Profile Management' is selected. The 'New Profile' dialog box is displayed in the foreground, with the following fields filled in:

- Profile name: Cell C LTE
- User name: Your Name
- Password: \*\*\*\*\*
- APN: lte.broadband.is

Buttons for 'Save' and 'Cancel' are visible at the bottom of the dialog box. In the background, the 'Profile Management' screen shows a dropdown for 'Profile name' set to 'Cell C LTA(default)' and a text field for 'User name' containing 'Your Name'. A blue arrow points from the text below to the 'Profile Management' section of the settings.

Change the 'User Name' and 'Password' to your preference. Update 'APN' name to **lte.broadband.is** and click 'Save'



# STEP 6 | VERIFY APN SETTING

The screenshot displays the Huawei Settings application interface. At the top, there is a language dropdown set to 'English', and navigation links for 'Help', 'admin', and 'Log Out'. Below this is a navigation bar with 'Home', 'Statistics', 'SMS', 'Update', 'Settings', and 'More'. The 'Settings' menu is open, showing options like 'Quick Setup', 'Dial-up', 'Profile Management', 'Network Settings', 'Ethernet', 'VPN', 'WLAN', 'DHCP', 'Security', and 'System'. The 'Profile Management' section is active, displaying a text block explaining APN settings. Below the text are four input fields: 'Profile name' (set to 'Cell C LTE(default)'), 'User name' (set to 'Your Name'), 'Password' (masked with dots), and 'APN' (set to 'lte.broadband.is'). A blue arrow points to the APN field. At the bottom of the form are three buttons: 'New Profile', 'Delete', and 'Apply'. The footer contains 'Privacy Policy', 'Copyright © 2006-2017 Huawei Technologies Co., Ltd.', and 'Open Source Notice'.

English Help admin Log Out

HUAWEI

Home Statistics SMS Update Settings More

Quick Setup

Dial-up

Connect

→ Profile Management

Network Settings

Ethernet

VPN

WLAN

DHCP

Security

System

### Profile Management

The Access Point Name (APN) is the name for the settings your device reads to set up a connection to the gateway between your carrier's cellular network and the public Internet. Most of the time, your device already has these settings in the system files, and can fill in the APN information automatically when it connects. If the APN can't connect to the Internet automatically, you can change the APN manually.

Profile name: Cell C LTE(default)

User name: Your Name

Password: .....

APN: lte.broadband.is

New Profile Delete Apply

Privacy Policy | Copyright © 2006-2017 Huawei Technologies Co., Ltd. | Open Source Notice |

New APN settings should be set as per the screenshot.

Once verified, click 'Apply'

# CONGRATULATIONS, APN CONFIGURATION SET UP COMPLETE!

